
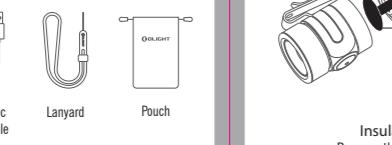


Baton 3 Stainless Steel

Thank you for purchasing this Olight Product. Please read this manual carefully before use and keep it for future reference!

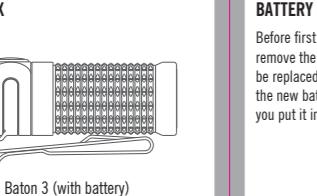


SPECIFICATIONS

TURBO	HIGH	MED	LOW	MOON
165m	82m	38m	18m	—
1.5m	6.89cd	IPX8	—	—
0.2-4.9W/0.03lm	0.6-3.03z	(Including Battery)	—	—

* All above specifications are test results based on ANSI/NEMA FL1-2008 Standard. The tests are performed using the battery included in the flashlight.

BATTERY INSTALLATION


Before first use, please unscrew the body and remove the insulating film. If the battery needs to be replaced, make sure that the positive end of the new battery faces the flashlight head when you put it in.



AVAILABLE BATTERIES

- 1 x customized 550mAh 3.7V IMR16340 rechargeable battery, not compatible with any other batteries

BATTERY LEVEL INDICATOR

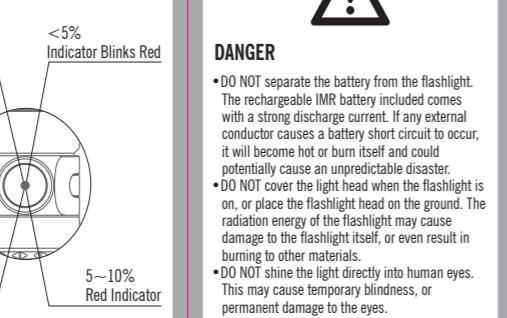

NOTE: If using moonlight mode, the battery will only display when the battery level is below 5%.

DANGER

• DO NOT separate the battery from the flashlight. The rechargeable IMR battery included comes with a short discharge circuit. If any external conductor causes a battery short circuit to occur, it will become hot or burn itself and could potentially cause an unpredictable disaster.

• DO NOT cover the light head when the flashlight is on, or place the flashlight head on the ground. The radiation energy of the flashlight may cause damage to the flashlight itself, or even result in burning to other materials.

• DO NOT shine the light directly into human eyes. This may cause temporary blindness, or permanent damage to the eyes.

EXCLUSION CLAUSE

Olight is not liable for damages or injuries sustained resulting from the usage of the product inconsistent with the warnings in the manual, including but not limited to using the product inconsistent with the recommended lockout mode.

WARNING


• Keep out of reach of children.

• When the flashlight is working on the high mode, the surface temperature can reach 50°C. Please switch off the lockout mode.

CHARGING

GREEN
Charging Completed

RED
Charging



* Before first use please fully charge the product.

* Connect the USB end of the magnetic charging cable to an external USB power source, then attach the other end of the cable to the charging port of the light best charging efficiency with a USB power source of no less than 5W (5V 1A).

The red indicator means charging, while the green indicator means charging complete.

NOTICE

• When the flashlight is turned off, the current mode will be memorized. The modes that can be memorized are: moonlight, low, medium, and high mode (after the light is turned off, the high mode will be memorized for 10 minutes before reverting to medium mode. If the light is turned off on turbo mode, the high mode will be memorized instead and will also revert to medium mode after 10 minutes (turbo mode can not be memorized)).

• Turn off the light for 1 minute and then step down to high mode.

• Moonlight and turbo mode are not the normal brightness levels (low, medium and high mode).

Under moonlight and turbo mode, press and hold the switch to enter the normal brightness level cycle.

• When the product is used in a low-temperature environment, please try and keep it warm. If the temperature is too cold, it may not reach the highest output.

• DO NOT short-circuit the copper pole in the center of the tailcap with the flashlight's metal housing. The short circuit in this case will result in an electric discharge of below 3mA between them, and may lead to a complete battery drain if it is in this state for too long.

• DO NOT shine the light directly into human eyes. This may cause temporary blindness, or permanent damage to the eyes.

DANGER

• DO NOT separate the battery from the flashlight.

The rechargeable IMR battery included comes with a short discharge circuit.

If any external conductor causes a battery short circuit to occur, it will become hot or burn itself and could potentially cause an unpredictable disaster.

• DO NOT cover the light head when the flashlight is on, or place the flashlight head on the ground. The radiation energy of the flashlight may cause damage to the flashlight itself, or even result in burning to other materials.

• DO NOT short-circuit the copper pole in the center of the tailcap with the flashlight's metal housing. The short circuit in this case will result in an electric discharge of below 3mA between them, and may lead to a complete battery drain if it is in this state for too long.

• DO NOT shine the light directly into human eyes. This may cause temporary blindness, or permanent damage to the eyes.

EXCLUSION CLAUSE

Olight is not liable for damages or injuries sustained resulting from the usage of the product inconsistent with the warnings in the manual, including but not limited to using the product inconsistent with the recommended lockout mode.


WARNING

• Keep out of reach of children.

• When the flashlight is working on the high mode, the surface temperature can reach 50°C. Please switch off the lockout mode.

CONTENTS

(EN) English 01
(CN) 简体中文 02
(FI) Finnish 02
(NO) Norwegian 03
(SV) Swedish 04
(NL) Nederlands 05
(PL) Polska 06
(DE) Deutsch 07
(HU) Magyarország 08
(RU) Русский 09
(ES) Español 10
(RO) Romanian 11
(UA) Ukrainian 12
(JP) 日本語 14
(FR) Français 16
(BG) Български 17
(IT) Italia 18
(SK) Slovenský jazyk 19



* Before first use please fully charge the product.

* Connect the USB end of the magnetic charging cable to an external USB power source, then attach the other end of the cable to the charging port of the light best charging efficiency with a USB power source of no less than 5W (5V 1A).

The red indicator means charging, while the green indicator means charging complete.

NOTICE

• When the flashlight is turned off, the current mode will be memorized. The modes that can be memorized are: moonlight, low, medium, and high mode (after the light is turned off, the high mode will be memorized for 10 minutes before reverting to medium mode. If the light is turned off on turbo mode, the high mode will be memorized instead and will also revert to medium mode after 10 minutes (turbo mode can not be memorized)).

• Turn off the light for 1 minute and then step down to high mode.

• Moonlight and turbo mode are not the normal brightness levels (low, medium and high mode).

Under moonlight and turbo mode, press and hold the switch to enter the normal brightness level cycle.

• When the product is used in a low-temperature environment, please try and keep it warm. If the temperature is too cold, it may not reach the highest output.

• DO NOT short-circuit the copper pole in the center of the tailcap with the flashlight's metal housing. The short circuit in this case will result in an electric discharge of below 3mA between them, and may lead to a complete battery drain if it is in this state for too long.

• DO NOT shine the light directly into human eyes. This may cause temporary blindness, or permanent damage to the eyes.

DANGER

• DO NOT separate the battery from the flashlight.

The rechargeable IMR battery included comes with a short discharge circuit.

If any external conductor causes a battery short circuit to occur, it will become hot or burn itself and could potentially cause an unpredictable disaster.

• DO NOT cover the light head when the flashlight is on, or place the flashlight head on the ground. The radiation energy of the flashlight may cause damage to the flashlight itself, or even result in burning to other materials.

• DO NOT short-circuit the copper pole in the center of the tailcap with the flashlight's metal housing. The short circuit in this case will result in an electric discharge of below 3mA between them, and may lead to a complete battery drain if it is in this state for too long.

• DO NOT shine the light directly into human eyes. This may cause temporary blindness, or permanent damage to the eyes.

EXCLUSION CLAUSE

Olight is not liable for damages or injuries sustained resulting from the usage of the product inconsistent with the warnings in the manual, including but not limited to using the product inconsistent with the recommended lockout mode.

WARNING

• Keep out of reach of children.

• When the flashlight is working on the high mode, the surface temperature can reach 50°C. Please switch off the lockout mode.

ON/OFF

ON/OFF: Single click the side switch to turn the light on/off. When the light is turned on, it will return to the previous brightness level selected before the light was turned off.



* Please use caution when turning the light on/off. The light may become very bright, causing damage to your eyes.

* If the light is turned off, it will remain on until the side switch is pressed again.

* Please do not turn the light on/off frequently, as this may shorten the life of the battery.

CHANGE BRIGHTNESS LEVEL

When the flashlight is on, press and hold the side switch to change the brightness level.

The brightness level is automatically cycled through Low, Medium, and High mode.

The mode is selected when the side switch is pressed again.

Please keep the front lens clean. Due to radiation energy, it may heat up foreign matter on the lens which can potentially cause damage.

The battery can only be stored inside the product and charged with the included specified charger.

Store the battery with care. Please store the battery in a dry box after use.

The battery is not suitable for use in a humid environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a low-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.

The battery is not suitable for use in a high-temperature environment.

The battery is not suitable for use in a high-humidity environment.