



USER MANUAL

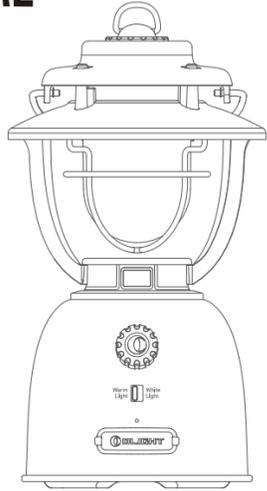


Olantern Stretch
A camping light with an adjustable light head height.

IN THE BOX

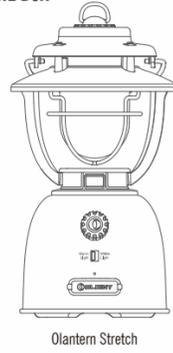

Olantern Stretch




USB-C to USB-C cable

SPECIFICATIONS

WHITE LIGHT MODE CCT: 3250~3750K



WARM LIGHT MODE CCT: 1900~2100K



	HIGH	LOW
White Light Mode	20m	10m
Warm Light Mode	10m	2m


LIGHTING RADIUS (ELEVATED)	HIGH	LOW
White Light Mode	2.9m	2.4m
Warm Light Mode	2m	1.1m

100cd	IPX5	0.8m	1080g/38.1oz
-------	------	------	--------------

(D)123*(H)222mm (D)4.84*(H)8.74in	Rechargeable Li-ion Battery 20000mAh 3.7v [74Wh]	Working temperature 0-45°C
--------------------------------------	---	-------------------------------

*Above data are tested per ANSI NEMA FL-1 2019 standard in Olight's labs for reference. The tests are performed indoors under a room temperature of 25 degrees celsius with windless conditions. The runtime may vary depending on the external temperature and ventilation conditions, and these biases may affect the results of testing.


PRODUCT OVERVIEW

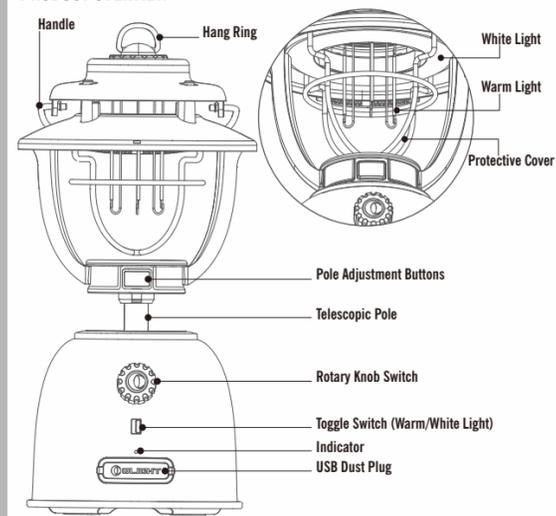

CHARGING

Before first use, please fully charge the product. Connect one end of the provided USB-C cable to an external USB-C power source (power adapter not included), open the silicone dust plug that shields the USB-C charging port of the product, and then insert the other end of the cable into the USB-C charging port.


While charging, the indicator below the rotary knob blinks red to indicate it is in charging status, and the indicator turns green to indicate it is fully charged (battery power >95%).

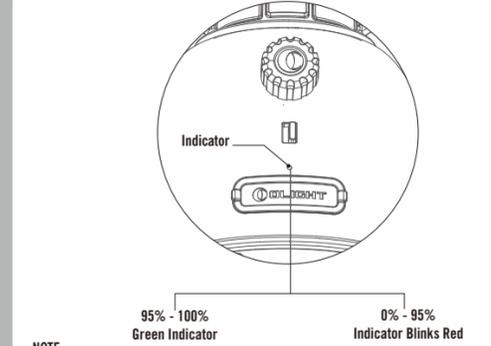

NOTE
* Best charging efficiency with an 18W or higher-capacity power source. It takes only 5.5 hours to fully charge with a 18W USB-C power source.


POWER BANK FUNCTION

Built-in with a 20000mAh battery pack consisting of 5 Li-ion batteries, it can charge phones and other digital devices.

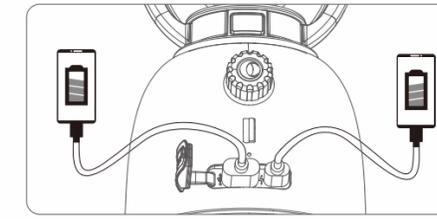


REVERSE CHARGING (POWER BANK FUNCTION)

The product has 2 output ports for charging other digital devices. While reverse charging, the indicator displays the battery level.

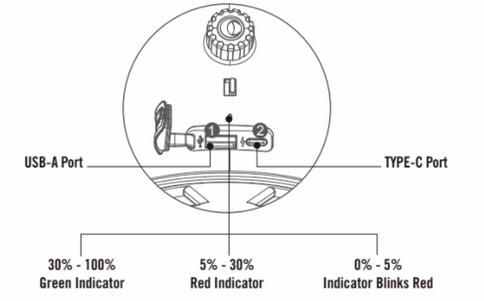


While activated (Light):
The indicator ring will be on for 5S after any operation and will turn off after no operation.

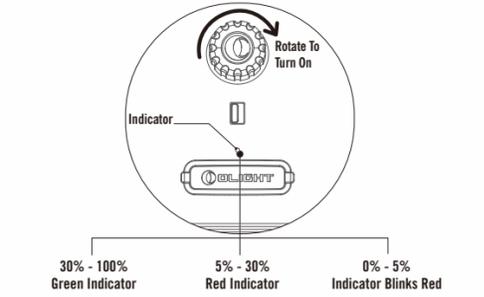


OPERATION INSTRUCTIONS


ON/OFF: Rotate the knob clockwise to turn on the light; rotate the knob counterclockwise to turn off the light.

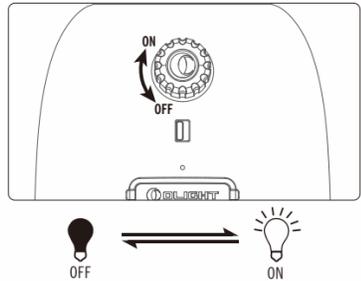


Warm/white Light Switching: Toggle the switch left for warm light, right for white light.

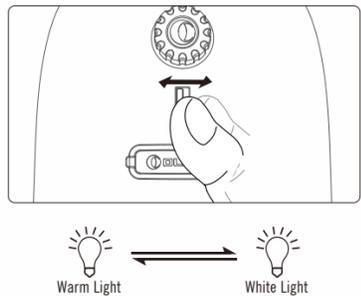


Stepless Brightness Control: Turn the knob clockwise to increase brightness. Turn the knob counterclockwise to decrease brightness.

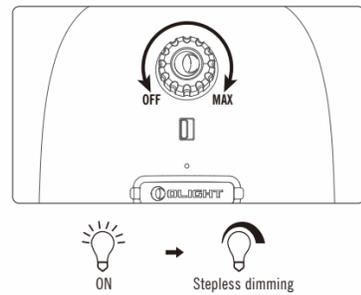


Telescopic pole adjustment:
a. Press the adjustment buttons on the light body to pull the light head upwards.

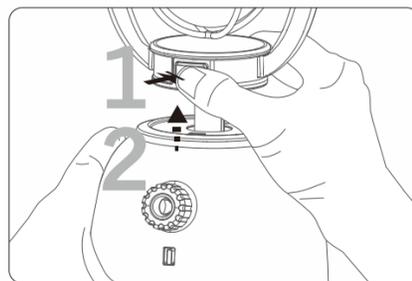

b. Hold and stretch the light head upwards to your desired height (the maximum height is 20cm).

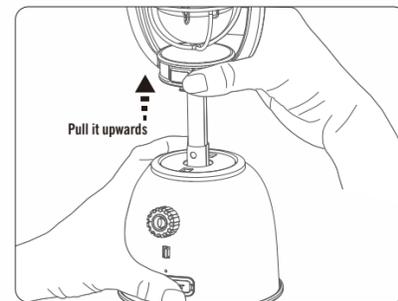

c. To retract the light, press the light head downwards until it reaches the bottom.

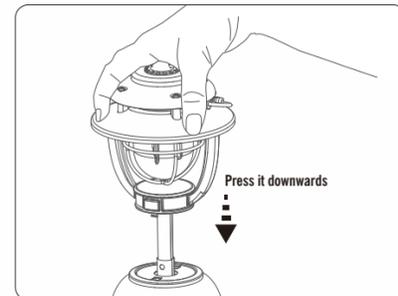

DANGER

• DO NOT shine the light directly into human eyes. This may cause temporary blindness or permanent damage to the eyes.

WARNING

- DO NOT store the product in the car or any place where the temperature may exceed 60°.
- When the charging port is not in use, please keep the dust plug inserted to prevent dust or foreign matters from entering.
- DO NOT place the product in any dusty environment. Otherwise, the dust may enter the rotary knob switch and cause it to malfunction.
- DO NOT disassemble the product.
- DO NOT immerse the product in seawater or other corrosive media to avoid damage to the product.
- Please prevent it from falling and handle it with care.
- Fully charge the battery before storing the light for a long period of time.

NOTICE

- Please keep the product away from radios, as the PWM modulation of the rotary knob may cause noise to the radio signals.
- The vintage copper color is a result of aging craftsmanship. The uneven color is normal.
- Best charging efficiency with a 18W or higher-capacity power source.
- The product charges between 0°C and 45°C and discharges between -10°C and 45°C. Extreme temperatures may temporarily interrupt charging or discharging.

EXCLUSION CLAUSE

Olight is not liable for damages or injuries sustained resulting from the usage of the product inconsistent with the warnings in the manual.

WARRANTY

We provide a warranty for products that experience defects in material and workmanship under normal use. We will repair or replace the products depending on the specific situation. However, please note that the warranty does not cover loss, theft, deliberate damage, or cosmetic damage. For the complete warranty information, please visit Olightworld.com or your local Olight official website.

USA Customer Support:

cs@olightstore.com

Australia Customer Support:

contact@olightstore.com.au

Germany Customer Support:

kontakt@olightstore.de

France Customer Support:

cs@olightstore.fr

UK Customer Support:

contact@olightstore.uk

Japan Customer Support:

cs@olightstore.jp

Canada Customer Support:

cs@olightstore.ca

Korea Customer Support:

olightkorea@olightworld.com

Austria Customer Support:

kontakt@olightstore.at

Italy Customer Support:

contatto@olightstore.it

Spain Customer Support:

contacto@olightstore.es

Thailand Customer Support:

cs@olightstore.co.th

China Customer Support:

Wechat: [olightcs](https://www.officialwechat.com/olightcs)

For other countries and regions, please contact **Global Customer Support:** contact@olightworld.com



Dongguan Olight E-Commerce Technology Co., Ltd

4th Floor, Building 4, Kegou Industrial Park, No 6 Zhongnan Road, Changan Town, Dongguan City, Guangdong, China.

Made in China

