

## S1R BATON II

# BORN TO BE DIFFERENT

COMPACT RECHARGEABLE EDC FLASHLIGHT



## S1R BATON II

The S1R Baton II is the highest output compact rechargeable flashlight ever produced by Olight. Armed with a premium beam profile, articulate texturized grip pattern, and a more efficient magnetic charging system makes this the ultimate every day carry flashlight.





## GREATER OUTPUT DELIVERED

MAX.

# 1,000 LUMENS


Powered by A Single IMR16340 Battery

\* No other battery types are recommended for use in this flashlight.

## THE PURSUIT OF THE PERFECT GRIP

The S1R II adopts a brand new small squared texture milling pattern for an extremely firm grip and great look.



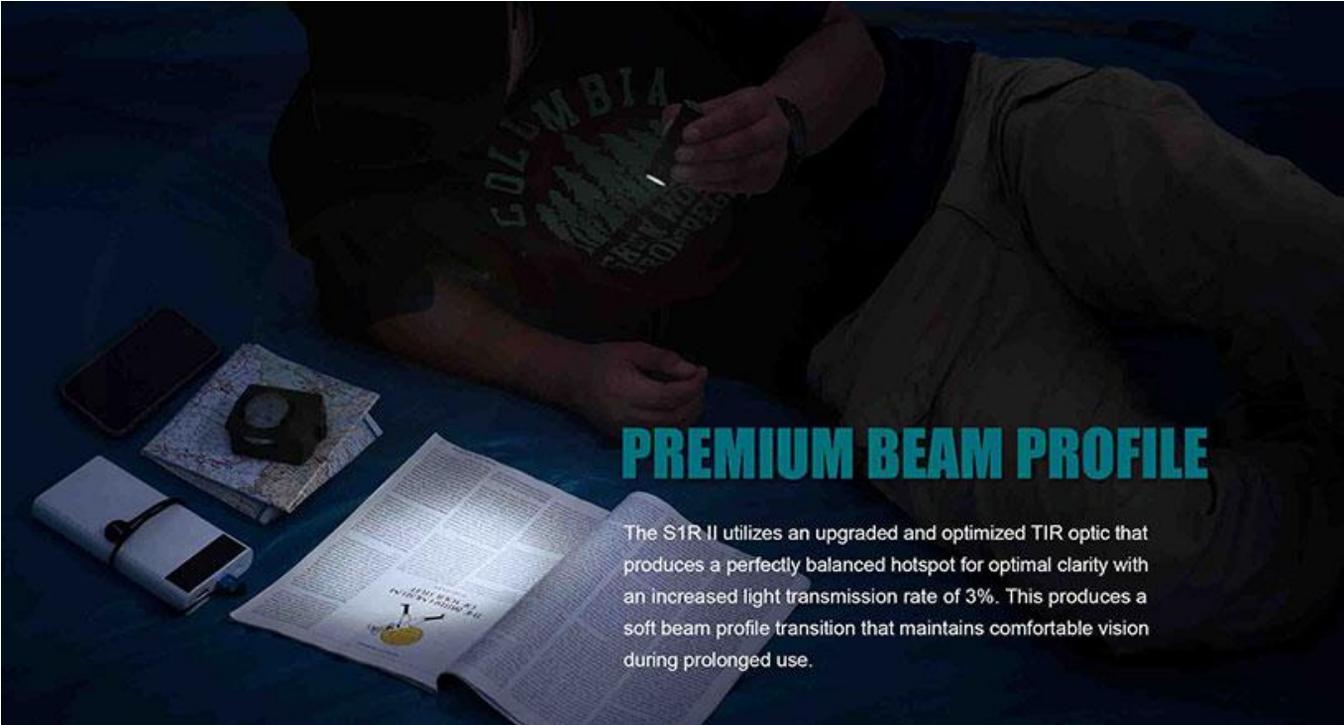

## PREMIUM BEAM PROFILE

The S1R II utilizes an upgraded and optimized TIR optic that produces a perfectly balanced hotspot for optimal clarity with an increased light transmission rate of 3%. This produces a soft beam profile transition that maintains comfortable vision during prolonged use.




## THREE-COLOR POWER LEVEL INDICATION

Once the light is turned on, the power indicator located in the center of the side switch shows the power level in three colors.



Power>60% (Green)    Power: 60%~10% (Yellow)    Power<10% (Red)

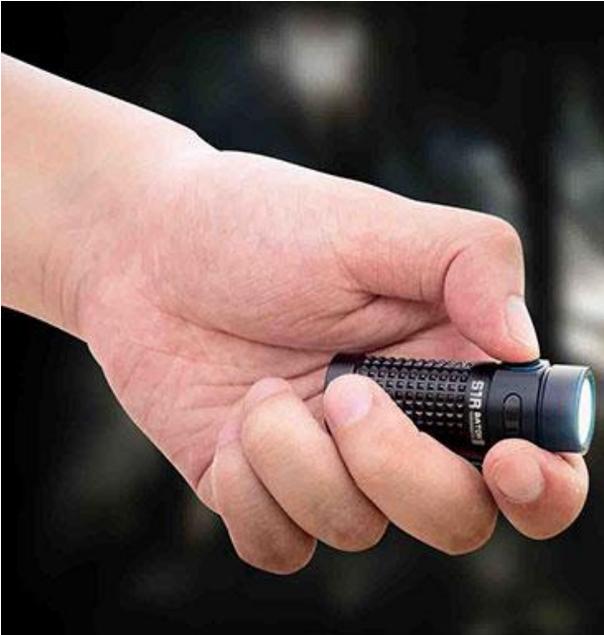

## COMPACT AND LIGHT WEIGHT

The S1R Baton II is extremely slim and compact at only 1.8 oz/51 g with the battery installed. While still easy for a firm grip in any sized hand, this flashlight can also fit in your pocket, attach to a belt loop or backpack strap while barely knowing it's there.



## HIGHLY EFFICIENT MCC II CHARGER

The new round-edged included magnetic USB charger is not only 13% thinner than the previous MCC but is also compatible with existing Olight MCC rechargeable products (MCC II is not compatible with R50 Pro and PL MINI) with a faster 1A current charging speed.



# IPX8 WATERPROOF RATING

Rated for up to 2 meters under water without any damage.



## SPECIFICATIONS



MAX OUTPUT  
**1,000 Lumens**



MAX RUNTIME  
**8 Days**



MAX THROW  
**145 Meters**



BEAM INTENSITY  
**5,250 cd**



WATERPROOF  
**2 Meters**



POWERED BY  
**1 x IMR16340**



WEIGHT  
**1.8 oz/51g**




DIMENSION  
**(L)2.48in/63mm  
(HD)0.83in/21mm**

### Olight S1R Baton II

Price: **69,95 EURO** (UVP, inkl. MwSt.)

EAN: 6926540918817

Mehr von Olight: [www.new-tech-products.com/support/Olight\\_Product-Catalog-2018\\_080218\\_small.pdf](http://www.new-tech-products.com/support/Olight_Product-Catalog-2018_080218_small.pdf)



The S1R II Baton is the first of Olight’s new generation of single IMR16340 powered rechargeable side-switch EDC flashlights.

This extremely compact light reaches an incredible max output of 1,000 lumens thanks to the included new high discharge rate battery.

The second-generation TIR optic lens pushes the beam to a new level with unmatched clarity and balanced hotspot.

While retaining the classic look of the Baton series, the S1R II features an articulate texturized body pattern that provides a great feel resulting in a firmer grip.

It also comes with the upgraded MCC II magnetic USB charging cable that is thinner and compatible with all existing Olight MCC rechargeable products (MCC II is not compatible with R50 Pro and PL MINI).

This S1R II is the ultimate pocket light in performance and convenience. Carry the best.

**FEATURES**

**1,000-lumen output:** With the help of the all new customized 10C discharge current lithium-manganese battery, the S1R II delivers a huge output of 1,000 lumens in a small pocket light powered only by a single IMR16340.  
**Premium beam:** Perfectly balanced hot spot for optimal clarity and a soft transition to maintain comfortable vision during use.

**Three-color power level indication:** Once the light is turned on, the power indicator located in the center of the side switch shows the power level in three colors (Green: Power>60%, Yellow: Power is between 10% and 60%; Red: Power<10%).

**Highly efficient MCC II charger:** This round-edged magnetic USB charger is not only 13% thinner than the previous MCC but is also compatible with all existing rechargeable flashlights and headlamps using this charging method. The new MCC II provides another fast charging solution to future Olight products with high capacity batteries.

[1000 lumen rechargeable flashlight](#)   [high lumens flashlight](#)   [small flashlight](#)   [pocket led flashlight](#)   [high intensity led flashlight](#)  
[aluminum led flashlight](#)   [waterproof flashlight](#)

GENERAL DATA

Beam Distance (ft)	476
Beam Distance (m)	145
Max. Performance (lumens)	1000
Charge type	Magnetic USB charge base
Compatible Batteries	customised RCR123A IMR
Light Intensity (candela)	5250



## GENERAL DATA

Light Form	Wide/broad hotspot. Perfect for up close illumination.
Lens / Reflector Type	TIR reflector (big, defined wide hotspot)
Mode Operation	Side Switch
Form/Size Factor	Small size (Car key / Zippo Lighter)
Series	Series S (EDC, General Use)
Unique Characteristics	<p>1,000-lumen output: With the help of the all new customized 10C discharge current lithium-manganese battery, the S1R II delivers a huge output of 1,000 lumens in a small pocket light powered only by a single IMR16340.</p> <p>Body built for grip: Small squared texture milling for a perfect grip and feel.</p> <p>Premium beam: Perfectly balanced hot spot for optimal clarity and a soft transition to maintain comfortable vision during use.</p> <p>Three-color power level indication: Once the light is turned on, the power indicator located in the center of the side switch shows the power level in three colors (Green: Power&gt;60%, Yellow: Power is between 10% and 60%; Red: Power&lt;10%)</p> <p>Highly efficient MCC II charger: This round-edged magnetic USB charger is not only 13% thinner than the previous MCC but is also compatible with all existing rechargeable flashlights and headlamps using this charging method(MCC II is not compatible with R50 Pro and PL MINI). The new MCC II provides another fast charging solution to future Olight products with high capacity batteries.</p>
LIGHTING LEVELS	
LEVEL 1 (lumens)	1000
Run-time LEVEL 1	1000 lumens (~300lm); <b>37m</b> (1.5m)
LEVEL 2 (lumens)	600
Run-time LEVEL 2	600 lumens (~300lm); <b>45m</b> (1.5m)
LEVEL 3 (lumens)	60
Run-time LEVEL 3	<b>3h40m</b>
LEVEL 4 (lumens)	12
Run-time LEVEL 4	<b>20h</b>
LEVEL 5 (lumens)	0.5
Run-time LEVEL 5	8days



GENERAL DATA

Strobe Yes

SOS / BEACON No

TECHNICAL CHARACTERISTICS

Waterproof IPX8

Weight (g / oz) 51 / 1.8

Length (mm / in) 63 / 2.48

Head Diameter (mm / in) 21 / 0.83

Body Diameter (mm / in) 21 / 0.83

Led Cree XM-L2 CW

Packaging carton box

Use everyday carry , car, camping, fishing, household, EDC, general use

Package Contents  
 Olight S1R II flashlight x 1  
 MCCII Magnetic Charging Cable x 1  
 550mAh IMR RCR123A Battery x 1  
 Lanyard x 1  
 Battery box x 1  
 Pouch x 1  
 User Manual x 1

